

# ECK NEXT

The versatile solution for the workshop


ECOTECHNICS

SIMPLY EFFICIENT

ECK NEXT is designed for different types of refrigerant. ECK NEXT is characterised by innovative functions, simplicity and the high-quality standard of the components. The station offers high flexibility thanks to aftermarket upgrade possibilities. ECK NEXT, the easy station for the workshop.

## Fully automatic A/C charging station for recovery, recycling and charging for R134a or HFO1234yf

- Refrigerant configuration during activation with the relevant R134a or HFO kit
- Large 4.3" touch screen display for an easy, fast and intuitive navigation
- Energy-saving with 12-volt solenoid valve technology
- Optional Hybrid kit for flushing service hoses and internal circuits. Indispensable for the service on systems with an electric compressor.
- Automatic leakage control during the vacuum phase
- Optional refrigerant analyser for % detection of refrigerant components tested: HFO1234yf, R134a, R22, HC hydrocarbons and air.
- Oil management with both standard refillable containers and hermetic cartridges
- 2 large side pockets to comfortably accommodate even longer hoses
- WIFI connection available on request
- Complete database including commercial and agricultural vehicles

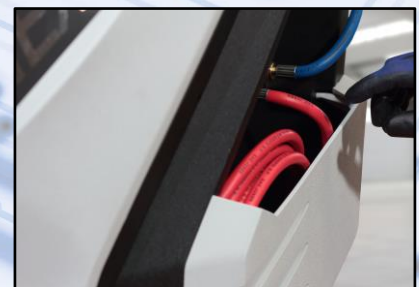

Y1N000000000

# ECK NEXT

The versatile solution for the workshop

ECOTECHNICS

SIMPLY EFFICIENT

ECK NEXT is designed for different types of refrigerant. ECK NEXT is characterised by innovative functions, simplicity and the high-quality standard of the components. The station offers high flexibility thanks to aftermarket upgrade possibilities. ECK NEXT, the easy station for the workshop.

Type of refrigerant	HFO1234yf or R134a
Display	4,3" colour touchscreen
Service valves	Manual
Thermal printer	Option
Hermetic and refillable containers for oil and dye	Not available
Hermetic disposable containers for oil and dye	Option 1
Refillable standard containers for oil and dye	Standard 1
Hoses	3 meters
Data Base Car-Truck-Agri	Standard
Refrigerant Configuration	Standard
Hybrid function / electrically driven compressors	Option
Pressure test forming gas / nitrogen	Not available
Gas Identifier / Gas Analyser	Option, Analyser
Connectivity WIFI	Option
Flushing Kit	Option
Leak check in vacuum	Standard
Non condensable gas purge	Manual
Voltage	220-240V 50/60 Hz
Vacuum pump	51 l/min, vacuum level 0,2 mbar
Sealed compressor	1/3 HP
Recovery speed	300 g/min in liquid phase
Tank Scale resolution	10 gr
Oil scale resolution	-
Working temperature range	11/49 °C
Filter system	1 filter for humidity
Refrigerant tank	12 liters refillable
Bottle heater	Not available
Dimension / weight	cm 67 x 68 x 108, 63 kg
Dimension / weight with packaging	cm 71 x 74 x 125, 81 kg

## STANDARD



Y1N000000000	ECK NEXT
Y1NH00000000	Refrigerant Kit HFO1234yf
Y1NR00000000	Refrigerant Kit R134a
Y1NH00000001	Refrigerant Kit HFO1234yf UK
Y1NR00000001	Refrigerant Kit R134a UK

## OPTIONS

